Technical Manual

Ti6K

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

* Nominal Impedance:	6 ohm
* Recommended Amp Power:	10–300 W
* Frequency Response:	50 Hz – 22 kHz (± 2dB)
* Sensitivity:	90 dB / 2,8V / 1 m
* Crossover frequency:	400/3,5 KHZ

SYSTEM COMPONENTS:

* Cabinet	CTI–6K (Not for sale)
* Grille:	GTi–6K (2404280)
* Woofer	806J 180mm (2)
	51mm voice coil
DC Resistance:	10 ohm
* Midrange	804TI 125mm
	40mm voice coil
DC Resistance:	4,1 ohm

SYSTEM COMPONENTS: (cont'd)

* Tweeter	Ti25K
DC Resistance:	3,8 ohm
* Crossover Network:	NTi6K (2704280)

PHYSICAL SPECIFICATIONS:

* Enclosure Dimensions (H.W.D):	39,4x14,3x21,0 In. D
	(1000x363x533mm D)
* Shipping Weight:	79 lbs. (36 kg.)

WARRANTY INFORMATION:

* Refer to the Warranty Statement packed with each product

PACKAGE

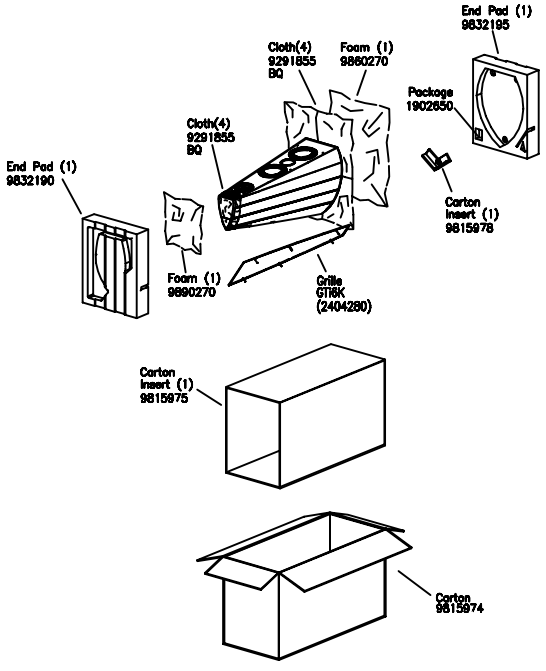

SCHEMATIC

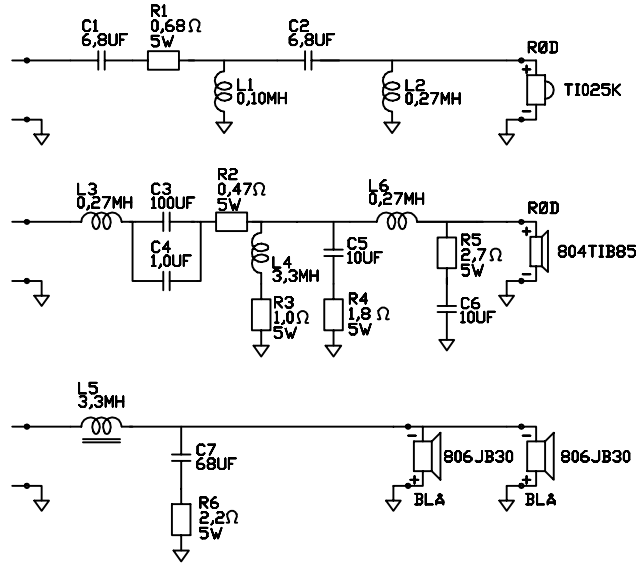

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

Ti6K

Valid from serial no. 00001
Rev. 10/8–1999

COMPONENT EXPLODED VIEW

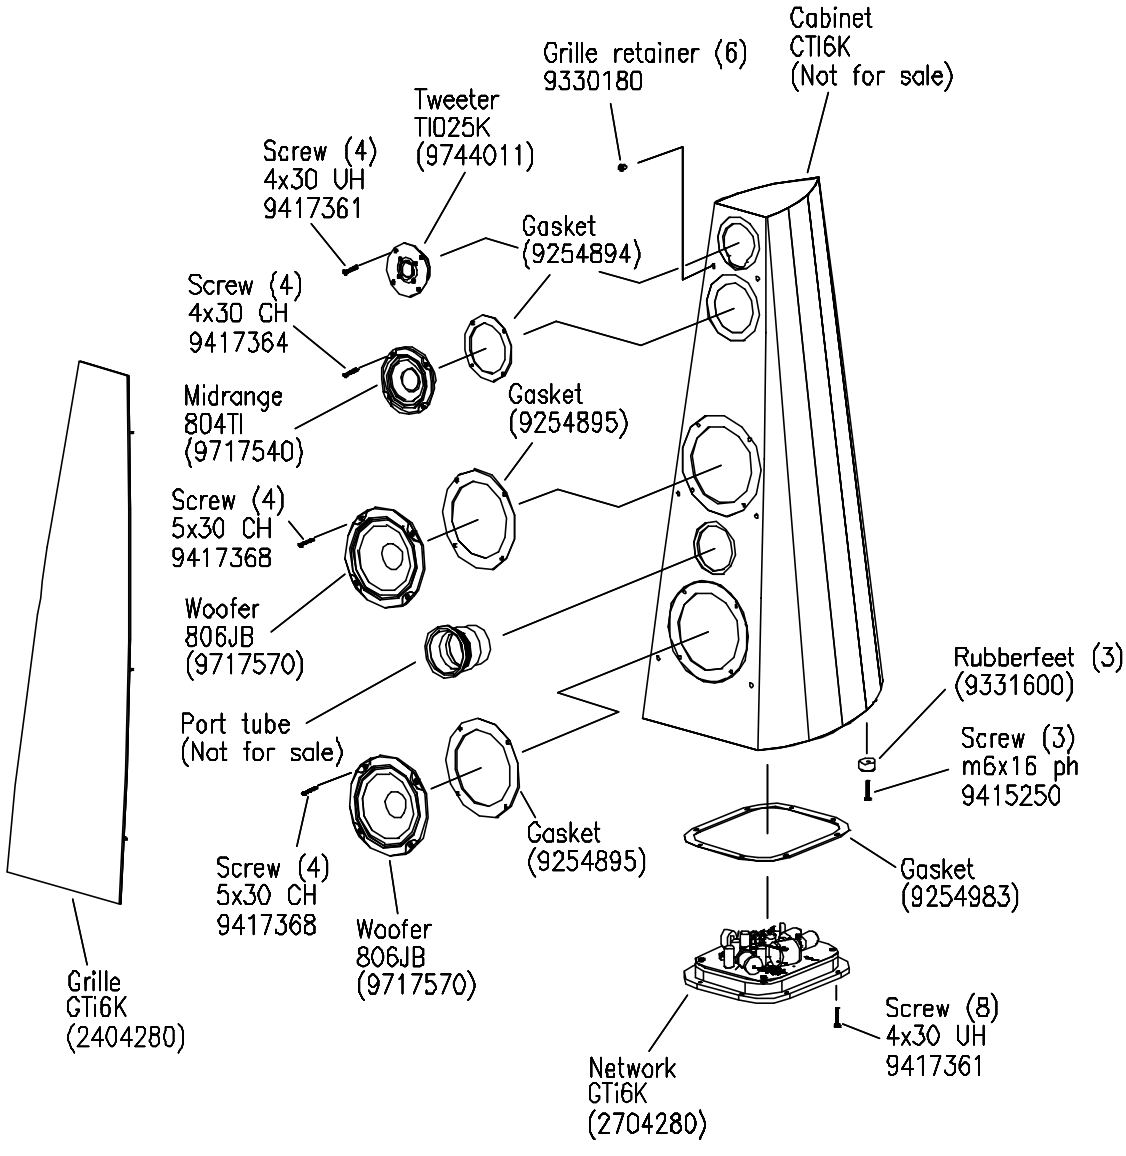

Spike (3)	9431385
Cone nut (3)	9431395